


* TO FACE OF JET INLET FLANGE
 JET INLET OPENING LOCATED ON
 BOTH SIDES OF BLOWER. ONLY
 ONE SIDE TO BE USED AS JET
 INLET. OTHER OPENING TO BE
 CLOSED WITH STEEL COVER PLATE,
 SUPPLIED BY ROOTS.

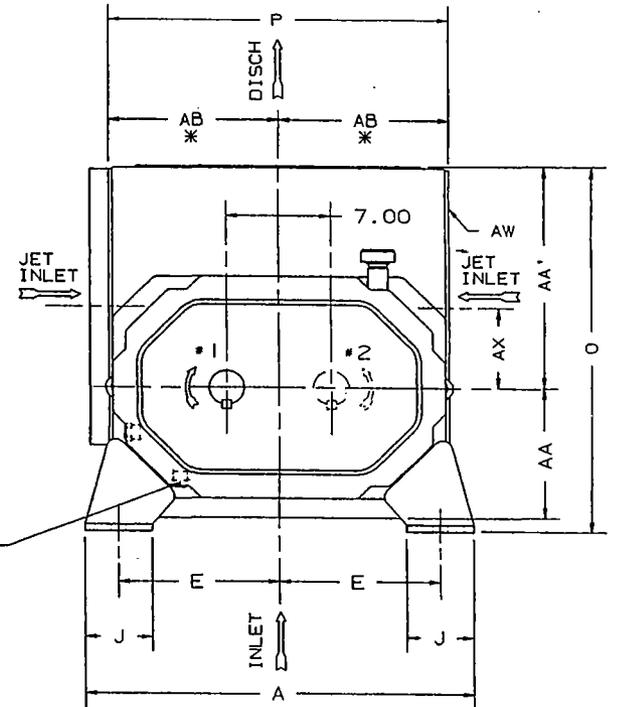

POSITION #1 FURNISHED
 UNLESS SPECIFIED OTHERWISE
 ALTERNATE POSITION #2
 ALSO AVAILABLE

INLET AND DISCHARGE FLANGES TO MATE
 FLUSH AND SQUARE WITH FLAT FACE
 FLANGES ONLY. USE FULL FACE GASKETS

FOR V-BELT DRIVEN UNITS
 MOTOR TO BE LOCATED ON
 DRIVE SHAFT SIDE OF BLOWER

	12"FLG
OPENING	12.00
BOLT CIRCLE	17.00
FLANGE O.D.	19.00
NO TAPPED HOLES	12
SIZE HOLES	7/8-9
TAP DEPTH	1.31

W - INLET & DISCHARGE
 AD - SHEAVE WIDTH
 AE - SHEAVE DIAMETER
 AW - JET INLET

700 DVJ-H DRY VACUUM WHISPAIR BLOWER

ALL DIMENSIONS IN INCHES

FRAME SIZE	A	B	C	D	E	F	G	H	J	K	M	N	O	P	U	V	KEYWAY	W	AA	AA'	AB	AD	AE	AW	AX	APPROX. WEIGHT
721	26.00	27.00	39.38	10.00	10.75	12.38	.50	1.00	4.50	3.00	15.25	4.56	25.25	22.75	2.375	3.00	.625 x .313	12"FLG	9.00	15.25	11.38	4.43	11.80	12"FLG	5.50	1750

CERTIFIED CORRECT FOR
 CUSTOMER ORDER No. _____
 ROOTS ORDER No. _____
 DATE _____

V-BELT DRIVE DATA	
BELTS	
DRIVE SHEAVE	
DRIVEN SHEAVE	
CENTER DISTANCE	
A-REVISED APPROX. WEIGHT JHB 11-9-93	
REVISIONS	



DRESSER INDUSTRIES, INC
 ROOTS DIVISION
 900 WEST MOUNT STREET
 CONNERSVILLE, INDIANA 47331

RE DR 2/10/93 CHKD DB APP RDA 873-983-021