

# VB110


## Three Phase TEFC Motor

- Flow to 645 cfm
- 15 hp
- NEMA Class F Insulation
- CE, UL Listed, CSA Certified Motor



### DIMENSIONS

Inches  
(Millimeters)

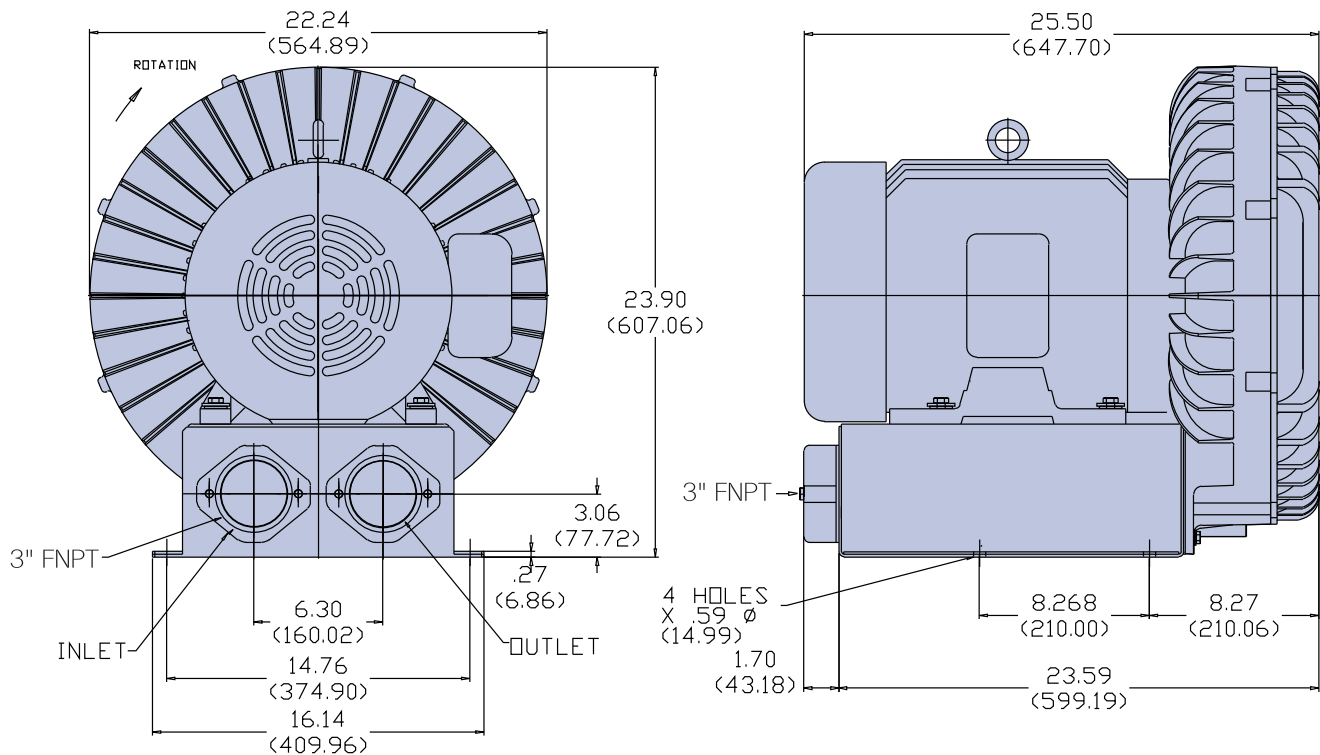

# VB110

## Three Phase TEFC Motor

### SPECIFICATIONS



Model No.	Freq	Maximum Volume		Maximum Operating Pressure		Maximum Operating Vacuum			Standard Voltage	FLA Current	Locked Rotor Current	Speed	Estimated Acoustical Noise Level	Weight	
		cfm	m <sup>3</sup> h	"H <sub>2</sub> O	mbar	"H <sub>2</sub> O	mbar	hp						lb	kg
VB110	60	645	1096	102	254.1	104	259.1	15	200-230/460,3Ø	38.5-35/17.5	250.4-288/144	3490	80dba@60Hz	370	168
	50	538	914.2	94	234.2	76	189.3	12.5	190/380-415,3Ø	35.2/17.6-16.6	276/138-126.4	2880		370	168

Maximum Ambient Temperature: 104°F/40°C. Maximum Internal Motor Temperature: 311°F/155°C.

### PERFORMANCE

**60Hz**

**50Hz**

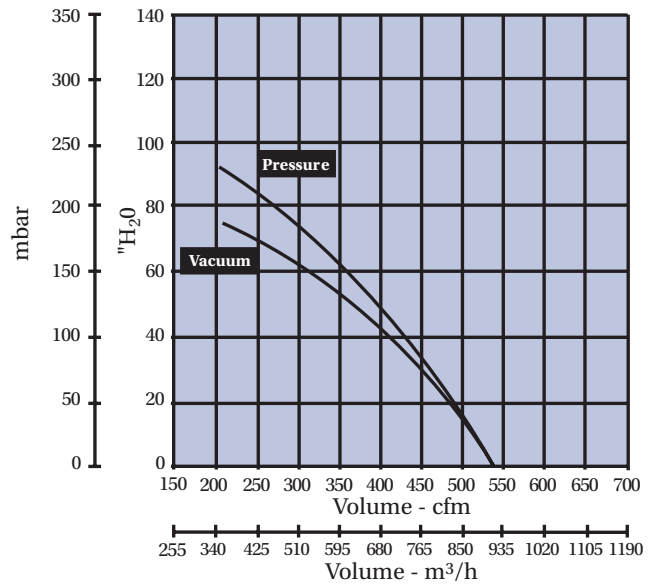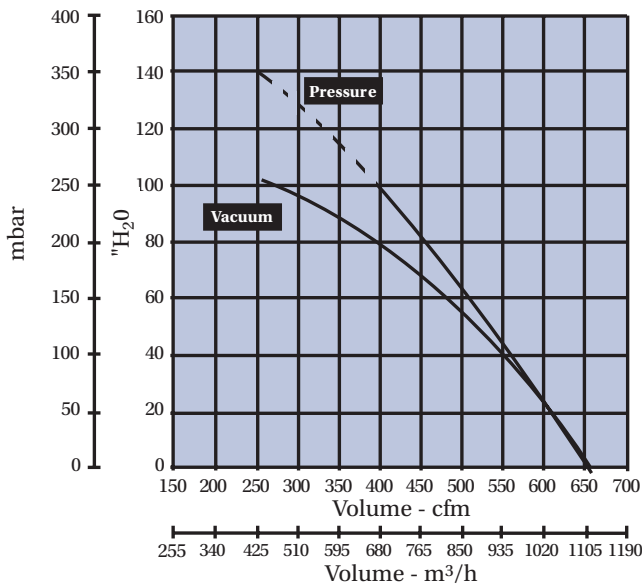

Note: Dimensions, specifications and performance data are subject to change without notice. Contact factory for latest information.