

PROCESS DISCHARGE
(3" FL- CL150 RF)


COOLING WATER
OUT (2" NPT) IN

BIODIESEL VACUUM SEAL
WATER COOLER
(E-B1-2403)

ELECTRICAL



ISO 9001:2008

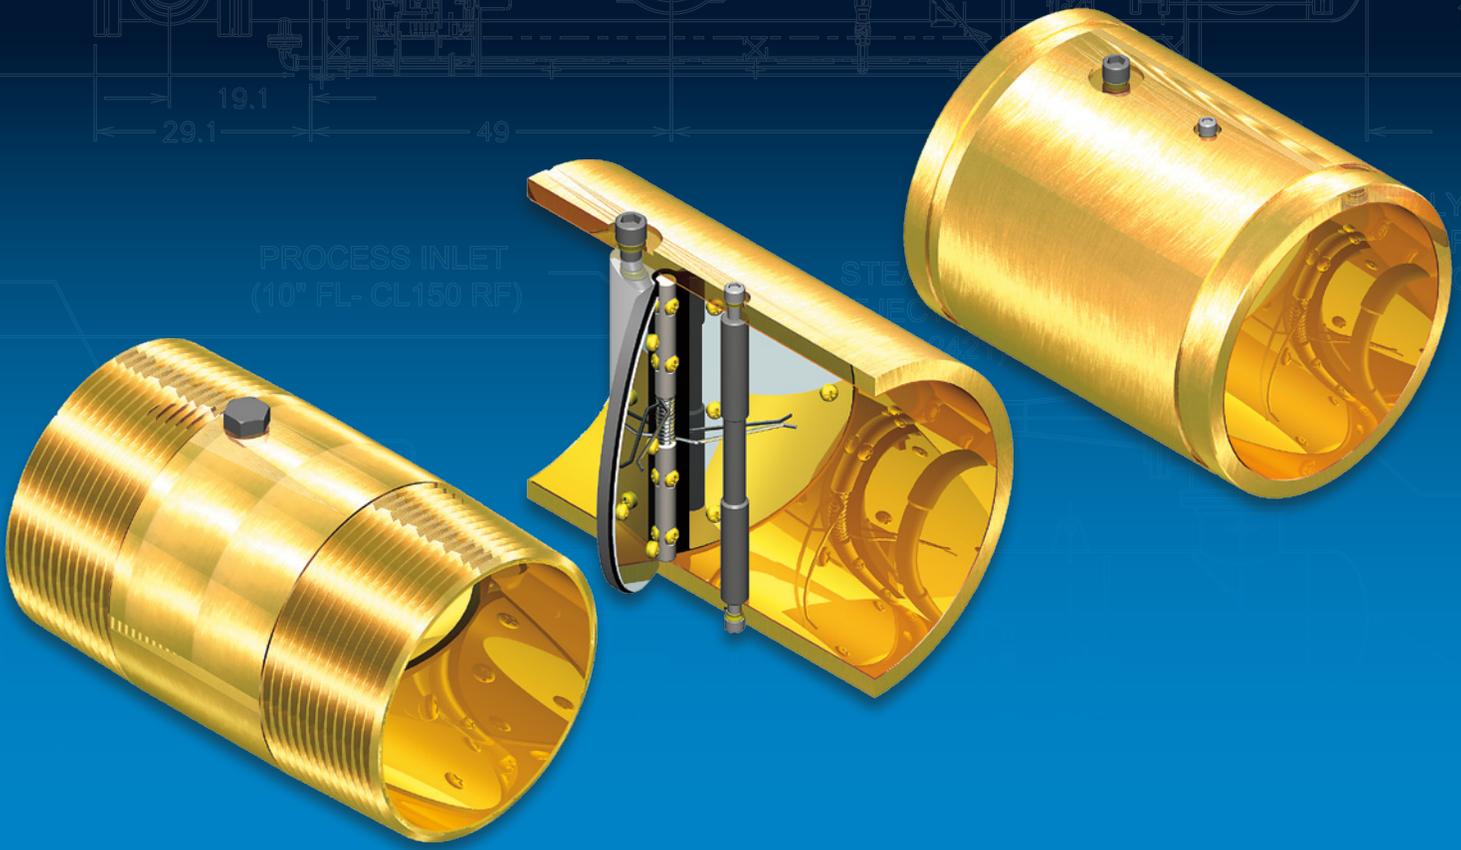

Full Port Check Valves

Male NPT, Plain & Grooved End
Lowest Pressure Drop

Maximizing the Flow

Full Port • Lowest Pressure Drop • Quick Delivery

Full Port, Lowest Pressure Drop

Full Port Check Valves provide more flow and lower pressure drops than conventional check valves. Our elastomer hinge check valve design takes performance to an entirely new level by eliminating the restrictive valve seat and substantially increasing the valve's open area and flow coefficient (Cv). The resulting flow is more laminar, with lower pressure loss and reduced turbulence. It also improves valve life and reliability. Keeping pressure loss low is always important, but particularly so when handling low pressure air and gases.

Dual disc check valves are the clear choice for many piping engineers because of their proven reliability, ease of installation and low ΔP . Now, they are available in a full port design that dramatically improves performance. They are ideal for application in vacuum pumps, compressed air and gas systems as well as in water systems where low head loss and elimination of water hammer are desirable.




US Valve Male NPT, Grooved and Plain End Check Valves are available in a wide variety of materials and configurations to fit your application requirements.

Valve Testing

Every elastomer hinge check valve we manufacture is assembled, inspected and tested in our plant in Maryland -USA. Our commitment to quality assures you the performance and reliability you demand and expect. Material test reports and test certificates are available on request.

U.S. Valve LLC – The Right Choice

US Valve is a New Jersey Corporation with headquarters in New Jersey and manufacturing locations in Maryland–USA, Europe and Asia. Our primary focus is check valves and our roots are grounded in low pressure drop designs. Our application engineers can assist you in making the right choice of valve for your application.

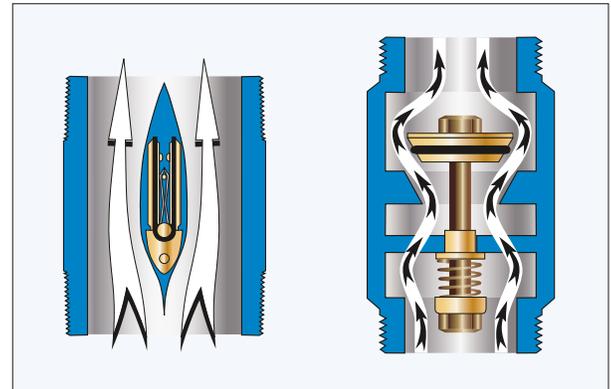

U.S. Valve Design
Open flow path, low ΔP ,
more laminar flow

Conventional Design
Restricted flow path, high ΔP ,
increased turbulence

Low Price, Delivery & Service

We want to be your supplier of Male NPT, Grooved and Plain End Check Valves, so we offer *Competitive Pricing, Fast Delivery and Outstanding Service*. We maintain an extensive inventory of valves, parts and components in a wide variety of materials so we can respond to your needs quickly. Valves are typically assembled and tested within 1 to 2 days after receipt of an order.

We can say with confidence that our customer service is the best in our industry. Give us a chance to prove it.

ISO9001:2008 Certified

US Valve is ISO 9001:2008 Certified.

We always keep our certification current. We take our commitment to product quality and documentation seriously. You can rest comfortably knowing that we provide only the best to our customers.



Features & Benefits

Full Port Check Valves offer some impressive advantages over other types of check valves.

• Low Pressure Drop (High Cv)

Our elastomer hinge check valves have larger open area than other designs, thus providing higher capacity and lower pressure drops than swing and lift check, or even traditional dual plate wafer designs.

• USA Content

When specified, valves can be manufactured to meet stringent 75% or higher USA raw material content requirements.

• ARRA Compliant

USA content, substantial transformation and local assembly makes our Full Port Check Valves ARRA compliant for government funded projects.

• Alleviates Water Hammer

When spring activated, our discs are designed to close 33% faster than standard dual disc check valves due to the fact that they are closed at a 30 degree angle. This makes for an effective non-slam design when installed in liquid applications.

• Simple Installation

Available in a variety of connection types including Male NPT, Female NPT, Grooved End and Plain End. Grooved End valves are suitable for use with Victaulic® couplings. Plain End valves are suitable for TIG welding or for use with hose clamps.

• Variety of Configurations

We stock a wide variety of valve bodies in different styles and materials. These can be assembled with any one of our standard disc, optional spring and elastomer seal choices to make a valve that exactly fits your application. Pins and hardware are always 316SS. Custom lengths are available.



Our patented, aerodynamic wing support and reinforced elastomer hinged double discs provide the lowest resistance to flow. Front and rear disc plates provide strength and stability and ensure positive seating. Optional springs are available in a variety of tensions.




Industries Served

- Industrial and Wastewater
- Vacuum Pumps
- Low Pressure Fans and Blowers
- Pneumatic Conveying Systems
- Well Applications
- Power Plants
- Oil and Gas Production
- Petrochemicals
- Steel/Primary Metals
- Pulp & Paper
- Marine



Valve Dimensions

Valve Dimensions

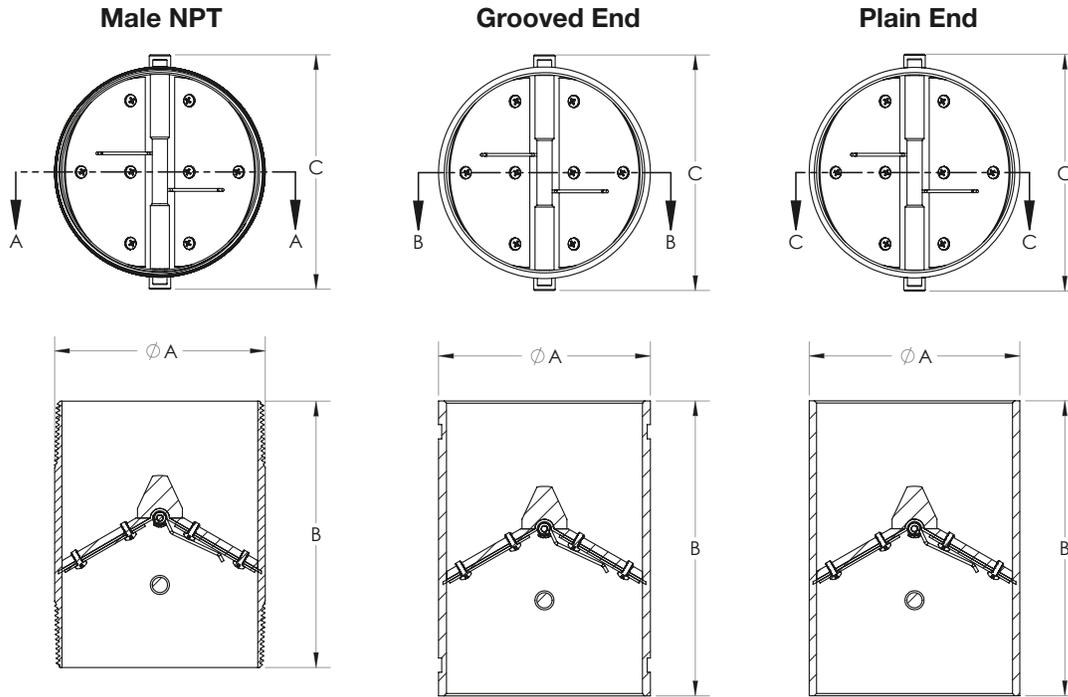

Male NPT Body (MNPT)

| Size | A | B | C |
|------|-------|-------|-------|
| 1 | 1.30 | 3.50 | 1.60 |
| 1 ¼ | 1.65 | 3.50 | 2.00 |
| 1 ½ | 1.90 | 4.00 | 2.30 |
| 2 | 2.35 | 4.00 | 2.80 |
| 2 ½ | 2.85 | 5.00 | 3.30 |
| 3 | 3.45 | 5.50 | 3.90 |
| 4 | 4.45 | 6.00 | 4.90 |
| 5 | 5.55 | 7.00 | 6.10 |
| 6 | 6.60 | 8.00 | 7.10 |
| 8 | 8.60 | 10.00 | 9.50 |
| 10 | 10.75 | 12.00 | 11.50 |
| 12 | 12.75 | 14.00 | 13.80 |

Grooved & Plain End Body

| Size | A | B | C |
|------|-------|-------|-------|
| 1 | 1.30 | 5.75 | 1.60 |
| 1 ¼ | 1.65 | 5.75 | 2.00 |
| 1 ½ | 1.90 | 5.75 | 2.30 |
| 2 | 2.35 | 5.75 | 2.80 |
| 2 ½ | 2.85 | 5.75 | 3.30 |
| 3 | 3.45 | 5.75 | 3.90 |
| 4 | 4.45 | 6.75 | 4.90 |
| 5 | 5.55 | 7.75 | 6.10 |
| 6 | 6.60 | 8.75 | 7.10 |
| 8 | 8.60 | 10.75 | 9.50 |
| 10 | 10.75 | 12.75 | 11.50 |
| 12 | 12.75 | 14.75 | 13.80 |

All dimensions in inches




Wide Range of Sizes & Materials

US Valve Male NPT (MNPT), Grooved and Plain End Check Valves are available in a wide range of sizes, materials and configurations to suit your application requirements. Full material and valve numbering specifications are shown on page 6, including a list of our standard valve models.

Exploded View • Valve Flow Coefficients (Cv)

Exploded View

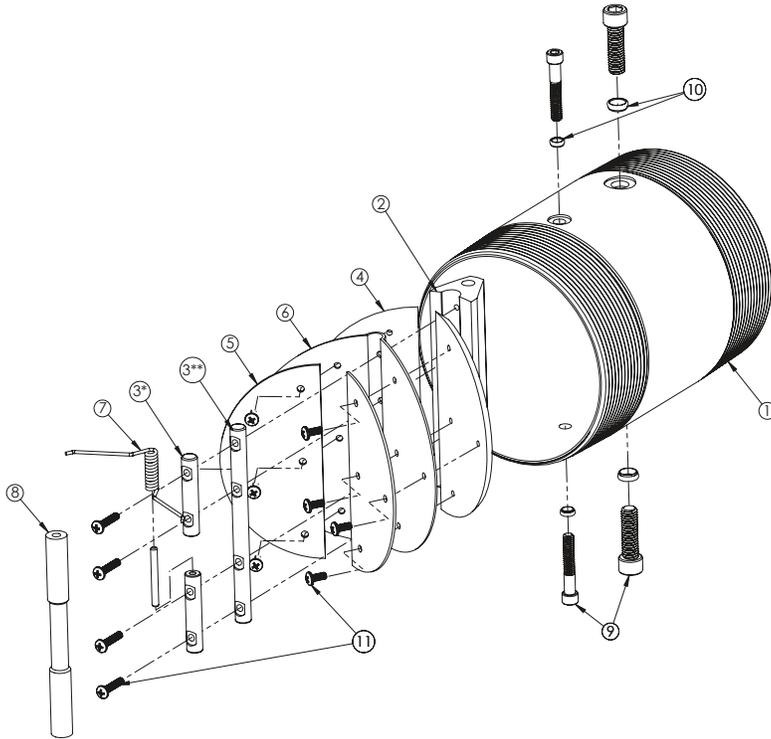

| Part No. | Part Description |
|----------|--------------------|
| 1 | Body (MNPT Shown) |
| 2 | Wing Support |
| 3* | Spring Pin |
| 3** | Wing Pin |
| 4 | Disc |
| 5 | Back-up Disc |
| 6 | Elastomer Seal |
| 7 | Spring |
| 8 | Limiter |
| 9 | WS/LM Fastener |
| 10 | Sealing Washer |
| 11 | Internal Fasteners |

Note: If valve is supplied with optional spring, use part number 3 (Spring Pin), otherwise use 3** (Wing Pin).*

US Valve Flow Coefficients (Cv) vs. Conventional Designs

| Size | US Valve Full Port Dual Disc | Conventional Duo Disc Design | Conventional Swing Check Design | Conventional Lift Check Valve |
|------|------------------------------|------------------------------|---------------------------------|-------------------------------|
| 1 | 37 | — | 22 | 17 |
| 1 ¼ | 65 | — | 39 | — |
| 1 ½ | 83 | — | 55 | 35 |
| 2 | 145 | 75 | 65 | 63 |
| 2 ½ | 350 | 95 | 90 | 100 |
| 3 | 590 | 190 | 135 | 148 |
| 4 | 920 | 375 | 215 | 260 |
| 5 | 1400 | 480 | 680 | 415 |
| 6 | 2800 | 820 | 1270 | 620 |
| 8 | 4900 | 1590 | 2350 | 1030 |
| 10 | 7200 | 2900 | 3850 | 1630 |
| 12 | 9000 | 4500 | 4750 | 2370 |
| 14 | 11000 | 5900 | 7400 | 3500 |
| 16 | 13000 | 8700 | 9550 | 5100 |
| 18 | 15000 | 10900 | 13000 | 6400 |
| 20 | 28000 | 14300 | 22000 | 7700 |
| 24 | 39000 | 23000 | — | 11100 |
| 30 | 58000 | 37000 | — | — |

Check Valve Flow Coefficient Comparisons (Cv) — GPM of water @ 60°F and 1 PSI Pressure Drop

Valve Numbering, Nomenclature and Standard Materials

Don't see what you're looking for?
 We stock and source thousands of valves and components in various sizes and materials not shown here.
 Please contact us to discuss options:
 +1.410.789.0999 • usv-info@idexcorp.com

Part Numbering

Style 07 (MNPT)

| Sizes ⁽²⁾ | – Style – | Material Codes | Elastomer Seal Codes | Spring Codes | Options |
|----------------------|-----------|----------------|-----------------------------|--------------------------------|---------|
| 2" & 3" | – 07 – | 00 | E | Blank or SP | (1) |
| 1" – 4" | – 07 – | 10 | B,E or S | Blank or SP | |
| 1" – 8" | – 07 – | 14 | B,E or S | Blank, SP or SL ⁽⁴⁾ | |
| 2" | – 07 – | 33 | B | Blank or SP | |
| 1" – 12" | – 07 – | 44 | B,V,E,S or T ⁽³⁾ | Blank, SP or SL ⁽⁴⁾ | |

Style 11 (Grooved)

| Sizes ⁽²⁾ | – Style – | Material Codes | Elastomer Seal Codes | Spring Codes | Options |
|----------------------|-----------|----------------|-----------------------------|--------------|---------|
| 2" – 4" | – 11 – | 00 | B,E or S | Blank or SP | (1) |
| 1.5" – 4" | – 11 – | 10 | B,E or S | Blank or SP | |
| 1" – 12" | – 11 – | 44 | B,V,E,S or T ⁽³⁾ | Blank or SP | |

Style 13 (Plain End)

| Sizes ⁽²⁾ | – Style – | Material Codes | Elastomer Seal Codes | Spring Codes | Options |
|--|-----------|----------------|----------------------|--------------|---------|
| Consult factory for available materials, elastomers and spring options | | | | | |

(1) Consult factory for additional options, special paint, drain holes, special springs & more

(2) Other sizes, consult factory

(3) Teflon seal, 4" and smaller only, other sizes, consult factory

(4) Light spring, 4" and smaller only, other sizes, consult factory

Example:

| | | | | | | | | |
|------|---|-------|---|---------------|----------------|--------|---|------------------------|
| Size | – | Style | – | Material Code | Elastomer Seal | Spring | – | Options ⁽¹⁾ |
| 6 | | 07 | | 44 | V | SP | | |

The above valve would be 6" diameter with a Standard MNPT Body Style (07), 316 Stainless Steel Body (4), 316 SS Disc (4), Viton Elastomer Seal (V), and a 316 SS Standard Torque Spring (SP). It would be designated **6-07-44VSP**.

Material Codes

| Material Code | Body | Disc | Wing Support | MAWP* |
|---------------|-----------------------------------|-------------------------------|-------------------------------|---------|
| 00 | Aluminum 6061T6 | Aluminum 6061T6 | Aluminum 6061T6 | 200 PSI |
| 10 | Carbon Steel ASTM A106 Gr. B | Aluminum 6061T6 | Aluminum 6061T6 | 250 PSI |
| 14 | Carbon Steel ASTM A106 Gr. B | 316 Stainless Steel ASTM A240 | 316 Stainless Steel ASTM A276 | 300 PSI |
| 33 | Brass C230 | Brass C260 | Brass C377 | 150 PSI |
| 44 | Stainless Steel ASTM A312 Gr. 316 | 316 Stainless Steel ASTM A240 | 316 Stainless Steel ASTM A276 | 300 PSI |



* MAWP – Maximum Allowable Working Pressure @ 60°F

All spring/wing pins and internal hardware of 316 stainless steel. External hardware material dependent on body material.

| Elastomer Seal Code | Material | Temp. Range |
|---------------------|----------|-----------------|
| B | Buna N | -60°F to 225°F |
| E | EPDM | -40°F to 250°F |
| V | Viton | -20°F to 400°F |
| S | Silicone | -100°F to 500°F |
| T | Teflon | -20°F to 450°F |

| Spring Code | Nomenclature |
|-------------|--------------------|
| Blank | No Spring |
| SP | SS316 Spring |
| SL | SS316 Light Spring |

Gas & Liquid Pressure Loss Information

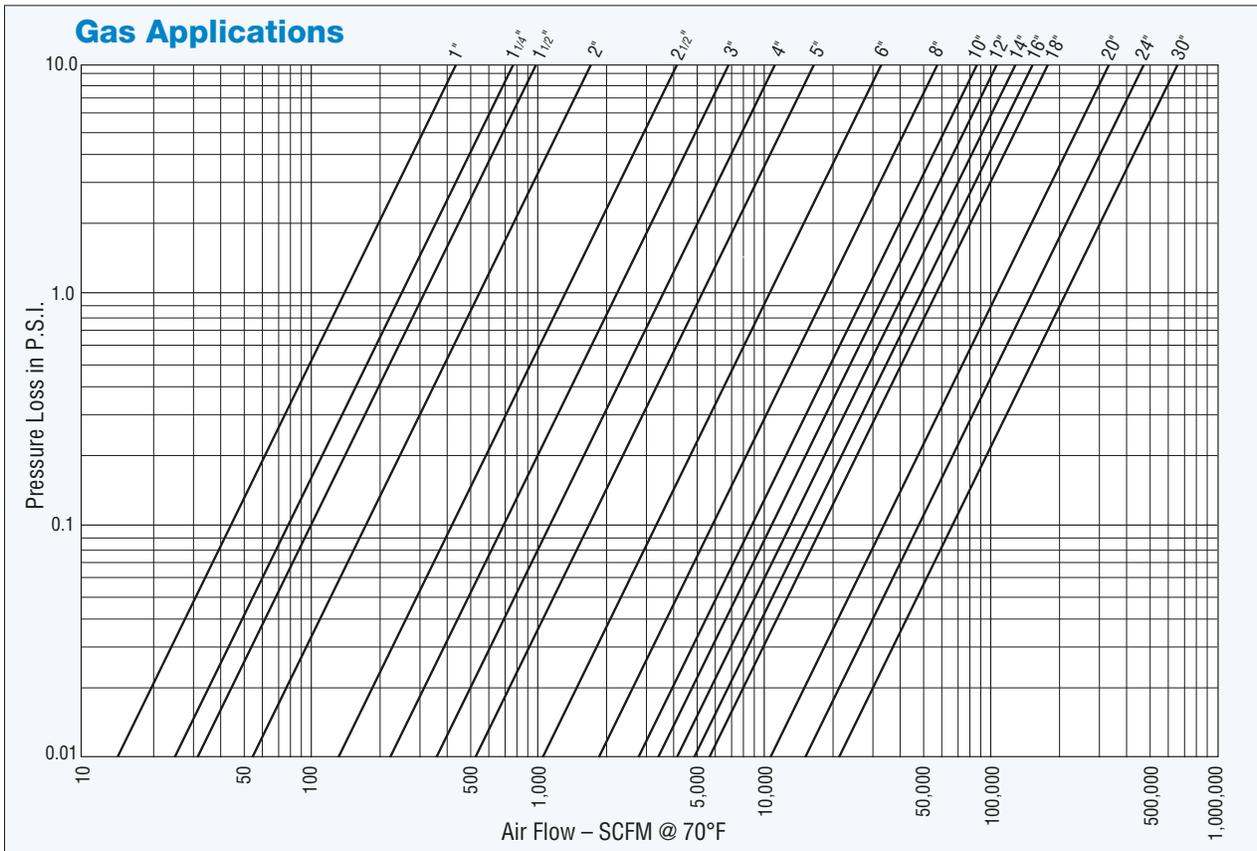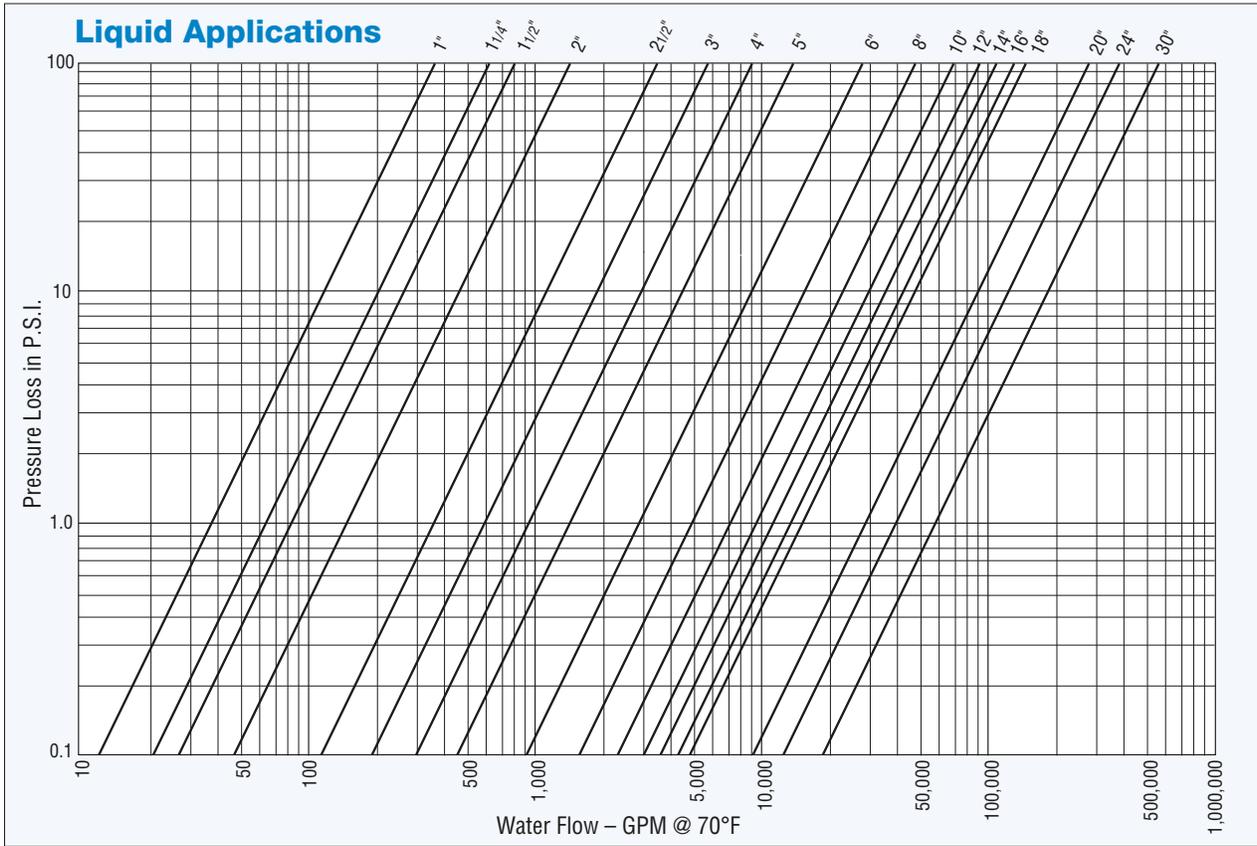

Pressure Losses for Gas Applications are based on valves without optional springs.


PROCESS DISCHARGE
(3" FL- CL150 RF)

COOLING WATER
OUT (2" NPT) IN

BIODIESEL VACUUM SEA
WATER COOLER
(E-B1-2403)



ISO 9001 : 2008

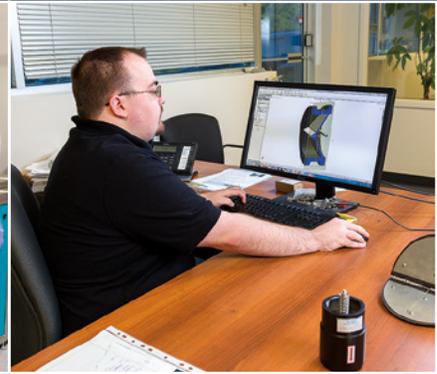

US Valve LLC
812E Oregon Avenue
Linthicum, MD 21090

T: 410.789.0999
F: 410.789.1009
info@usvalve.com
www.usvalve.com

Maximizing the Flow